


22 HDX Equipment Specifications

Length: 48' Height: 13'3" Width: 8'6" with ability to expand to: 12'6"



Production

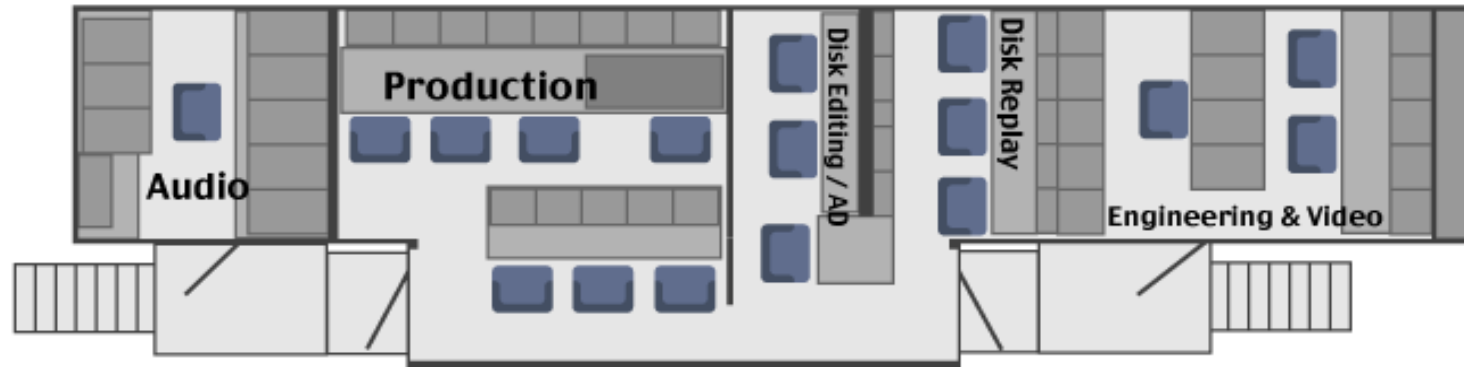

Replay



Audio



22 HDX Equipment Specifications

Production

- Grass Valley HD Kalypso switcher
- 4 M/Es, 75 inputs/48 outputs
- Internal Image Store
- 6 Channel internal DVEs
- 4 Stripe (M/E) control panel
- Up to 90 images in production wall
 - [Click here for monitor wall](#)

Cameras/ Lenses & Support

- 8 Grass Valley LDK 8000 Elite 720p/1080i triax cameras
- 6 Canon 72x9.3 long lenses
- 3 Canon XA17x7.6 ENG lenses
- Canon 12x4.3 ENG wide angle lens
- 6 Grass Valley SuperExpander sleds long lens adapters
- 6 Vinten Vector 70 heavy duty pan/tilt heads
- 6 Mathews MT1 heavy duty tripods
- 3 Gitzo ENG tripods with Libec H85 pan/tilt heads
- Studio Config Kit with LCD VF
- Panasonic AG-HPX370 fiber camera with lens and tripod (2 Single mode fibers per camera required) (Booth)
- 2 SD LPS clock cameras

Replay, Spotbox and Edit Systems

- Two 6 channel HD XT2 full editing units 4 inputs/ 2 outputs
- 4 Channel HD XT2 full editing unit 2 inputs/ 2 outputs
- 4 Channel HD XT2 replay only unit 2 inputs/ 2 outputs
- 4 Channel XS server for Spotbox
- Lance TDC-100 Disk Controller
- XFile3 with removable hard drives and USB 3.0
- GigE network available
- 2 DVD player/recorders
- 2 DVC Pro HD VTRs
- Up to 4 replay operator positions

Audio

- Euphonix MaxAir Audio console
- 108 Analog inputs/ 108 analog outputs, 30 AES pairs in/ 30 AES pairs out, 56 faders
- Digicart E with ZIP drive
- CD Player
- 4 Sennheiser MKH-70 long shotgun mics
- 4 AT 4071A long shotgun mics
- 4 Sennheiser 416 short shotgun mics
- 2 AT 4073A short shotgun mics
- 6 RE 50b stick mics
- 6 EV 635 stick mics
- 8 Sony ECM77B lavalier mics
- 6 Sportscaster headsets
- 6 Daltech announce boxes
- 6 DT12 Breakout Boxes
- 14 DT12 fanout
- 6 Fostex portable speakers
- Videotek ASM-100 audio scope
- Fiber Booth Kit (Upon request)
- 2 Parab Dishes (Upon Request)

Communications

- Telex 64-port Cronus intercom
- 12 Channels of IFB
- 12 Channels of PL
- 14 Telex 325 intercom belt packs
- 8 Telex 4030 IFB belt packs
- 4 Telos One Interfaces
- 2 RTS TIF 2000As
- 12 Line NEC phone system
- 12 Portable Motorola Two-Way Radios with 2 base stations

Graphics

- VizRT (provided for Fox shows only)
- Chyron HyperX3
- Fox Box (provided for Fox shows only)
- For- A Telestrator with HD touchscreen

Engineering & Misc

- 128x256 HD Harris Video Router
- 14 Frame sync/cross converters
 - 12 AJA FS-1s, 2 AJA FS-2s for a total of 16 paths
- 6 Utility HD to SDI downconverters
- 2 Lighting Kits

Outboard Monitors

- 10 Portable color monitors
 - *Capability to provide HD program to booth (If fiber is available)*

Cable

- 6350' Triax
 - Four 500', Fifteen 250', Six 100'
 - Two 6 line triax 175'
- 725' 10 Line video mult
 - Four 150', One 75', One 50'
- 900' TAC singlemode fiber
 - Two 300' TAC-12, Two 150' TAC-12
- 1850' DT12
 - Five 250', Four 150'
- 150' Three phase power cable
 - Sets of 100' and 50'
- Additional cable available if shipped separately

Power Required

- 208 VAC, three phase, 200 amps
 - *Separate 200 amps of three phase 208 VAC may be required in high heat locations*