


32 HDX Equipment Specifications

Length: 53' Height: 13'3" Width: 8'6" with ability to expand to: 16'



Production

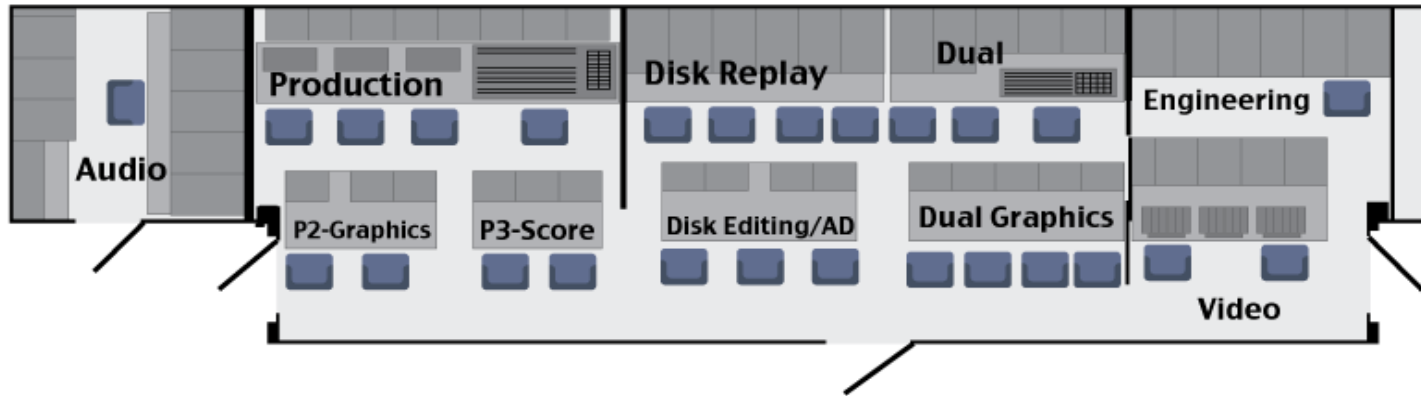

Replay



Dual Room Production



32 HDX Equipment Specifications

Production

- Grass Valley HD Kayenne switcher
- 4.5 M/Es, 96 inputs/48 outputs
- Internal Image Store
- 4 iDPMs/2 eDPMs/ 4 Chroma Keyers
- 4 Stripe (M/E) contol panel
- 2 Stripe (M/E) secondary switcher
- Up to 90 images in production wall
 - [Click here for monitor wall](#)

Cameras/ Lenses & Support

- 9 Grass Valley LDX 80 Premier 720p/1080i triax cameras
- 2 Grass Valley LDX 86 universe super slow mo HD/3G fiber cameras (Upon request. Can be used as regular live cameras)
- 2 Grass Valley 3G fiber converters (SHEDS)
- 9 Canon 72x9.3 long lenses
- Fujinon HA18x5.5 ENG lens
- 3 Canon XA17x7.6 ENG lenses
- Four 2" HH ENG VFs
- Studio Config Kit with LCD VF
- 2 Panasonic AG-HPX370 fiber cameras with lenses and tripods (2 Single mode fibers per camera required)(Booth)
- 9 Grass Valley RefleX SuperExpander sleds with 9" VFs
- 6 Vinten Vector 75 heavy duty pan/tilt heads
- 2 Vinten Vector 70 heavy duty pan/tilt heads
- Vinten Vector 750 heavy duty pan/tilt head
- 9 Mathews MT1 heavy duty tripods
- 4 Manfroto ENG tripods with Libec H85 pan/tilt heads
- 2 SD LPS clock cameras

Replay, Spotbox and Edit Systems

- 12 Channel EVS XT3 full editing unit
 - *Can be split into 2 operator positions each with 4 inputs/2 outputs*
 - *One position uses LSM Connect (No VGA)*
- Two 6 Channel EVS XT3 full editing units 4 inputs/2 outputs
- 4 Channel EVS XT3 Replay Only units 2 inputs/2 outputs
- 8 Channel K2 Summit with Dyno for instant replay of two 6x SSMO cameras (With file transfer of clips to EVS network)
- 4 Channel EVS XS server for Spotbox (2 Channels per show during dual feeds)
- Codecs supported:
 - *M-JPEG – User selectable bitrate 20-360Mbps*
 - *Avid DNxHD® (120/145Mbps)*
 - *Avid DNxHD® High Level (185/220Mbps, 8-bit and 10-bit)*
 - *VC-3 (SMPTE 2019-1; Avid-compatible) 100Mbps*
 - *Apple ProRes® 4:2:2 (120/145Mbps)*
 - *Apple ProRes® 4:2:2 HQ (185/220Mbps)*
 - *Apple ProRes® 4:2:2 LT (85/102Mbps)*
 - *MPEG-2 intra – User selectable bitrate 20-360Mbps*
 - *DVCPRO HD*
 - *AVC-Intra Class 100*
 - *XAVC-Intra Class 100*
- 2 Lance TDC-100 Disk Controllers
- 2 XFile3s with USB 3.0
- 2 DVD recorders/players
- Panasonic P2 Deck AG-HPD24P
- Up to 6 replay operator positions

Audio

- Euphonix System 5-B Audio Mixer (48 fader)160 analog inputs/164 analog outputs, 30 AES inputs/58 AES outputs
- Audio Board can output multiple channels of surround sound
 - *Encoders for surround sound are the clients responsibility*
- Enco Hotshot2 Audio Payout System
- Digicart E with ZIP drive
- CD Player
- 6 Audio Technica AT4073 short shotgun mics
- 9 Sennheiser MKH 416 P48 long shotguns mics
- 8 Sennheiser MD 46 stick mics
- 4 Sony ECM77B lavaliers
- 4 Sony ECM55B lavaliers
- 4 Crown PCC-160 Cardioid Microphones
- 7 Sennheiser HMD sportscaster headsets
- 6 Daltech talkback boxes
- 6 DT12 Breakouts Boxes
- 12 DT12 fanouts
- 6 Fostex portable speakers
- Fiber Booth Kit (Upon request)
- 2 Parab Dishes (Upon request)

Communications

- RTS ADAM Matrix System
- 96 Analog ports
- 12 Channels of IFB
- 12 Channels of PL
- 10 RTS 4030 IFB beltpacks
- 15 RTS BP325 headset boxes
- 4 Telos One Interfaces
- 3 RTS TIF 2000As
- 12 Line phone system
- 11 Two-Way Radios with 2 base stations

Graphics

- 2 VizRTs (provided for Fox shows only)
- Chyron HyperX3
- Fox Box (provided for Fox shows only)
- For- A Telestrator with HD touchscreen
- For- A Telestrator with HD touchscreen for secondary feed (Upon Request)

Engineering & Misc

- 160x352 Grass Valley Router HD-SDI
- 14 Frame sync/cross converters
 - *1 AJA FS-4s, 5 AJA FS-2s, 8 AJA FS-1s for a total of 22 paths*
- 12 Utility cross converters
- TSI-3000 tally system with virtual tally
- 2 Lighting Kits

Outboard Monitors

- Sixteen 16" Outboard LCD video monitors
 - *Capability to provide HD program to booth (If fiber is available)*

Cable

- 4350' Triax
 - *Two 500', Eight 250', Ten 100'*
 - *Two 6 line triax mults 175'*
- 575' 10 Line video mult
 - *Four 125', One 75'*
- 600' TAC singlemode fiber
 - *Three 150' TAC-12, One 150' TAC-6*
- 700' SMPTE fiber
 - *Two 250', Two 100'*
- 1700' DT12
 - *Two 250', Eight 150'*
- 150' Three phase power cable
 - *Sets of 100' and 50'*
- Additional cable available if shipped separately

Power Required

- 208 VAC, three phase, 200 amps
 - *Separate 200 amps of three phase 208 VAC may be required in high heat locations*

Dual Audio Trailer/Traction (DAT)

This equipment is available during dual feeds

- STUDER Vista 1 (32 fader)
- 50 Mono channels, 38 stereo channels
- 16 Mono aux, 4 stereo aux
- 10 Stereo Groups with Dynamics & EQ, 6 stereo busses
- Enco Hotshot2 Audio Payout System
- Digicart II Plus with 250 Mb ZIP drive
- CD Player
- 3 EV RE50 stick mics
- 3 Sennheiser HMD sportscaster headsets
- 3 Daltech talkback boxes
- 3 RTS 4030 IFB Beltpacks
- 3 RTS BP325 headset boxes
- 2 Telos One Interfaces
- 2 Lighting Kits
- 900' DT12
 - *Six 150'*